Stealthbox®

INSTALLATION GUIDE
for the

SB-H-CIVSDN/10W6v2

2006 - Up Honda Civic Sedan
(will not fit the coupe)

Thank you for choosing a JL Audio Stealthbox® for your automotive sound system. With proper installation, your new vehicle-specific enclosed subwoofer system will deliver years of listening pleasure.

We strongly recommend that you have your new Stealthbox® installed by your authorized JL Audio dealer. The installation professionals employed by your dealer have the necessary tools and experience to disassemble and reassemble your vehicle properly. Also, keep in mind that your warranty coverage extends to 2 years if your system is installed or approved by your authorized JL Audio dealer. If you prefer to perform your own installation, please read this installation guide completely before beginning the process.

JL AUDIO®
Ahead of the Curve™

IMPORTANT

If you choose to perform the installation yourself, it is absolutely vital that the Stealthbox® be properly mounted to the vehicle according to these instructions. Failure to mount the enclosure properly presents two problems:

1) The sub-bass performance will suffer due to the movement of the enclosure caused by the force exerted by the woofer(s).

2) A loose enclosure presents a serious safety hazard in the event of a collision or sudden deceleration.

INSTALLATION DIFFICULTY:

2 OUT OF 5

ESTIMATED TIME:
1 HOUR

STEP 1
Remove all contents from the trunk.

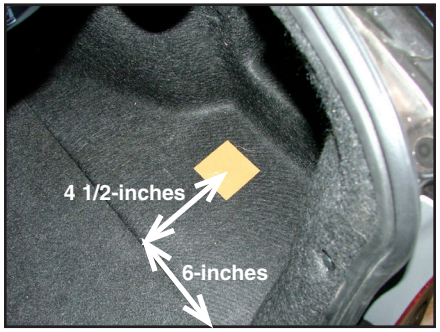

STEP 2
Place the supplied wax square into place.

STEP 3
Thread the supplied socket cup screw into the rear of the Stealthbox®, leaving 1/4-inch of the threads exposed.

Place the Stealthbox® into the mounting location and press firmly onto the Stealthbox®.

Remove the Stealthbox® carefully, leaving the wax square in place. The socket cup set screw will leave an impression onto the wax square.

Continued on Next Page

STEP 4

Note: Before drilling, make sure that you are not going to be drilling into any gas lines, brake lines, transmission lines, electrical wiring, transfer case (4x4 vehicles) or anything else that might cause a reduction in your weekly pay. Always wear eye protection when drilling!

With a drill and a 1/2-inch drill bit, drill through the impression made in the wax square.

Remove the wax square.

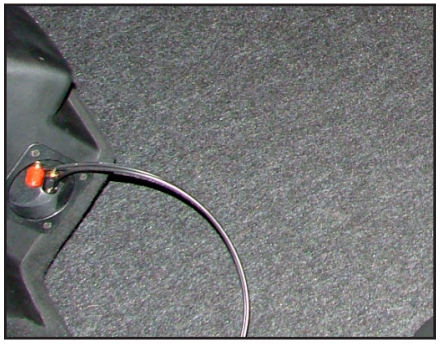

STEP 5

Run speaker wire from the amplifier's location to the Stealthbox® location and check for proper operation of the woofer.

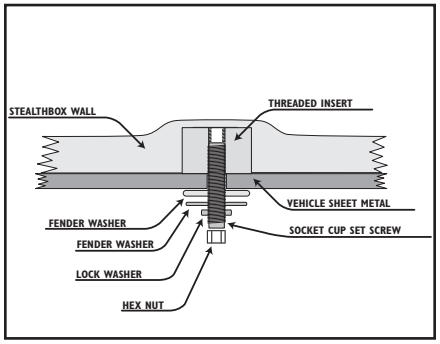

STEP 6

From under the vehicle, place a supplied fender washer, flat washer, lock washer and then hex nut onto the socket cup set screw and secure.

Note: For added protection it is recommended that you apply a bead of silicone between the vehicle and the fender washer. After the bolt assembly is tightly secured, it is also recommended that vehicle undercoating material is applied to the exposed assembly

CONGRATULATIONS

You have completed the installation for this model!

Please refer to the Power Recommendation section for an amplifier recommendation and basic set-up help.

INCLUDED HARDWARE

(1) 3/8-inch Split Lock Washer
(1) 3/8-inch x 2-inch Fender Washer
(1) 3/8-inch x 1 1/4-inch Fender Washer
(1) 3-inch x 3-inch Wax Square
(1) 3/8-inch -16 x 2 1/4-inch Socket Cup Set Screw
(1) 3/8-inch -16 Hex Nut

SPECIFICATIONS

Enclosure Type: Acoustic Suspension (sealed)
Driver Type: 10W6v2-D4
Nominal Impedance: 2 ohms mono
Continuous Power Handling: 600 Watts

POWER RECOMMENDATION

JL Audio recommends using a high quality amplifier such as the JL Audio 500/1v2.
The diagram below shows the recommended crossover, infrasonic filter and equalizer settings for the 500/1v2 when being used to power your Stealthbox®.

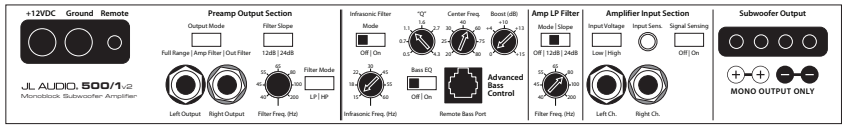

The JL Audio 500/1v2 is a very versatile audio component. Please consult the owner's manual for even more detailed information about installing and tuning this amplifier.

MID/HIGH FREQUENCY DRIVER FITMENT

A variety of JL Audio coaxial and component systems will fit in the factory speaker locations of you vehicle.

Front Speaker Size / Location: 6.5-inch / Front Doors
Fits JL Audio Models: TR650-CSi, TR650-CXi, VR650-CSi, VR650-CXi, XR650-CSi, XR650-CXi, C5-650, C5-650x & ZR650-CSi

Rear Speaker Size / Location: 6.5-inch / Rear Deck
Fits JL Audio Models: TR650-CSi, TR650-CXi, VR650-CSi, VR650-CXi, XR650-CSi, XR650-CXi, C5-650, C5-650x & ZR650-CSi

JL AUDIO®
Ahead of the Curve™

(954) 443-1100 | www.jlaudio.com

All specifications are subject to change without notice. "JL Audio®" and the JL Audio logo, "Stealthbox" and the Stealthbox logo are registered trademarks of JL Audio, Inc. "Ahead of the Curve" and its respective logo is a trademark of JL Audio, Inc.

JLA-SKU#011252-02-19-2008 • Printed in USA • ©2007 JL Audio, Inc. • U.S. PATENTS: #5,734,734 #5,949,898 #6,118,884 #6,229,902 #6,243,479 #6,294,959 #6,501,844 #6,496,590 #6,441,685 #5,687,247 #6,219,431 #6,625,292 #D472,891 #D480,709 Other U.S. & Foreign patents pending. For more detailed information please visit us online at **www.jlaudio.com.**

MEMBER | CEDIA Member

10369 NORTH COMMERCE PARKWAY • MIRAMAR, FLORIDA • 33025 • USA